


# CASAVA




- Heterogeneous Vinyl Flooring



CASAVA-3001

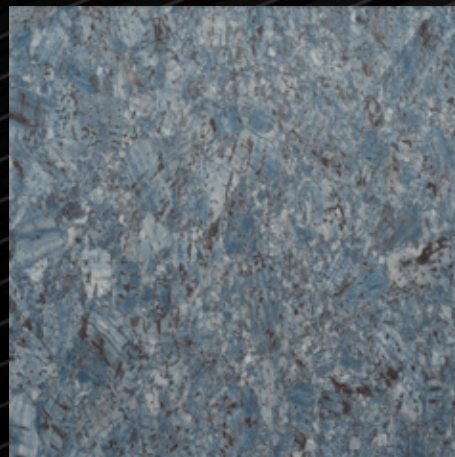

CASAVA-3002

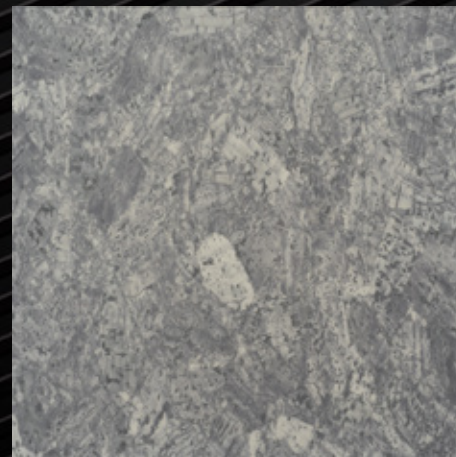

CASAVA-3018

CASAVA

**ottoman**  
BY ENESCO



## TECHNICAL CHARACTERISTICS

Test Items	Test Method	Test Results
Total Thickness	GB/T11982.1/ISO24346	2.0mm
Wear Layer Thickness	GB/T11982.1/ISO24340	0.3mm
Weight	GB/T11982.1/ISO23997	2000g/m <sup>2</sup>
Roll Width	GB/T11982.1/ISO24341	2m
Roll Length	GB/T11982.1/ISO24341	20m
Abrasion Group	GB/T11982.1 /EN660-2	Group T
Residual Indentation	GB/T11982.1/ISO24343-1	≤0.1mm
Color Fastness	GB/T11982.1/ISO 105-B02	≥Grade6
Anti-Chemical Resistance	GB/T11982.1/ISO26987	Fine
Dimensional Stability	GB/T11982.1/ISO23999	≤0.4%
Anti-slip Performance	DIN51130	R9
Roller Wear	GB/T11982.1/ISO4918	>25000R
Fire-proof Performance	GB/T8624	Grade B1
Limit of Harmful Substances	GB18586	Qualified