

Gravite



AF Com Center, Samed Vurgun Küç. No.60
Nesimi / Baku AZ1014 AZERBAJYAN
+994 12 5966030 +994 50 2503366
info@ottoman.az


F.S.M Mahallesi. Yeşil Vadi Konakları F/61
Ümraniye / İstanbul 34771 TÜRKİYE
+90 216 6502250 +90 541 3777671
info@enesco.com.tr



Gravite 200



Gravite 201

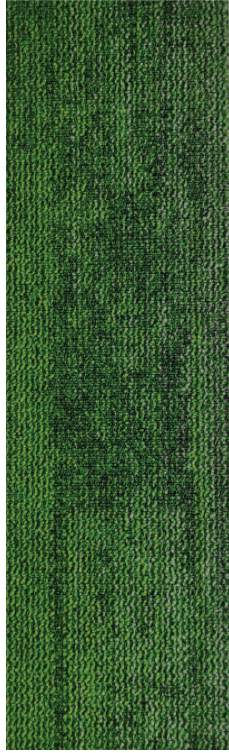

Gravite 203



Gravite 300



Gravite 301




Gravite Specification Sheet

Fiber:	PP
Structure:	Loop pile: Multi-Level loop
Gauge:	1/12"
Stitches:	10 per inch
Tufts/sqm:	186000
Average Pile Height:	4.0+/-0.5mm
Total Height:	7.0+/-0.5mm
Pile Weight:	715g/sqm
Total Weight:	3465g/sqm
Tile Size:	25*100cm
Backing:	E+Bac (bitumen)
Flammability:	ASTM E 645: ≥ 0.22 watts/cm ² Class II
Smoke Density:	ASTM E 662: ≤ 450 DMC
Dimensional Stability:	AACHEN: ≤ 0.2 %
Tuft Bind:	ASTM D 1335: ≥ 8.0 lbs
Delamination:	ASTM D 3936: ≥ 3.0 lbc/in
Static Propensity:	AATCC 134: ≤ 3.5 kV
Colorfastness to Light:	AATCC 16E: $\geq 4-5$
Colorfastness to Water:	AATCC 107: $\geq 4-5$
Colorfastness to Crocking:	AATCC 165: $\geq 4-5$



Reference picture

Approved Installation Method

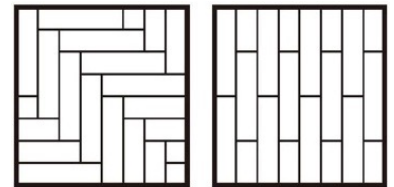

AATCC 16E
 $\geq 4-5$



AATCC 107
 $\geq 4-5$



AATCC 165
 $\geq 4-5$



AATCC 134
 ≤ 3.5 kV



ASTM D 3936
 ≥ 3.0 lbc/in



ASTM D 1335
 ≥ 8.0 lbs



AACHEN
 ≤ 0.2 %



ASTM E 662
 ≤ 450 DMC



ASTM E 645
 ≥ 0.22 watts/cm²
Class II

ottoman[®]
BY ENESCO

AF Com Center, Samed Vurgun Küçesi No.60 Nesimi
BAKU AZ1014 AZERBAJCAN
+994 12 5966030 +994 50 2503366
info@ottoman.az
www.ottoman.az

E F.S.M Mahallesi. Yeşil Vadi Konakları F/61
Ümraniye / İstanbul 34771 TÜRKİYE
+90 216 6502250 +90 541 3777671
info@enesco.com.t
www.enesco.com.tr