


STARRED


- Heterogeneous Vinyl Flooring



STARRED-206-362

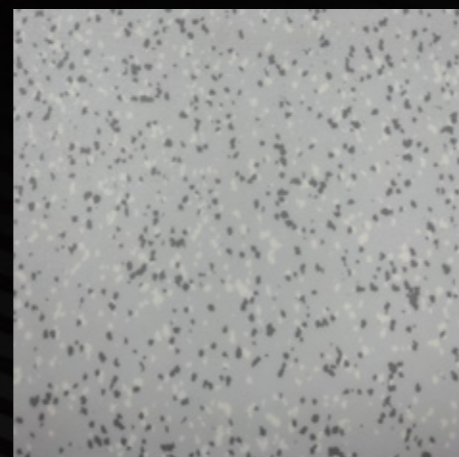

STARRED-206-309

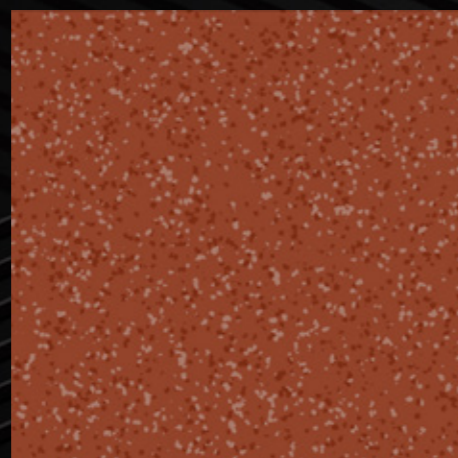


STARRED-206-318




STARRED-206-329



STARRED-206-331

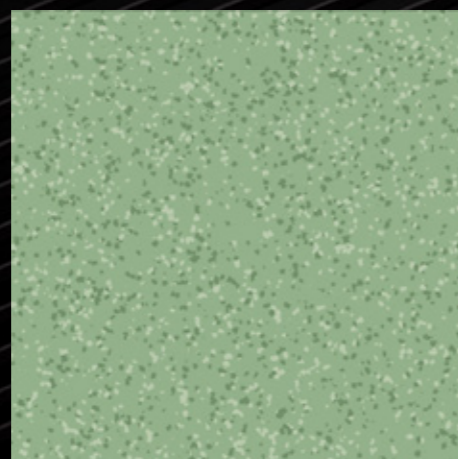

STARRED-206-342

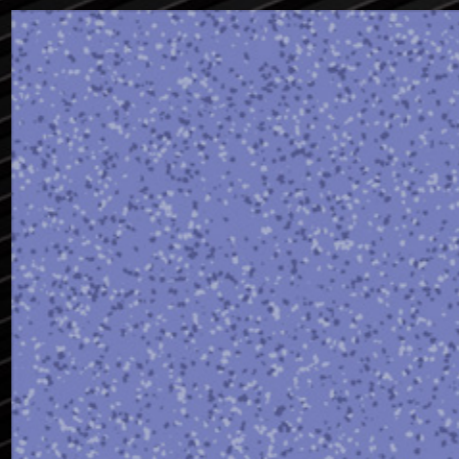

STARRED-206-363

STARRED



TECHNICAL CHARACTERISTICS

Test Items	Test Method	Test Results
Total Thickness	GB/T11982.1/ISO24346	2.0mm
Wear Layer Thickness	GB/T11982.1/ISO24340	0.3mm
Weight	GB/T11982.1/ISO23997	2900g/m ²
Roll Width	GB/T11982.1/ISO24341	2m
Roll Length	GB/T11982.1/ISO24341	20m
Abrasion Group	GB/T11982.1 /EN660-2	Group T
Residual Indentation	GB/T11982.1/ISO24343-1	≤0.2mm Starry
Color Fastness	GB/T11982.1/ISO 105-BO2	≥Grade6
Anti-Chemical Resistance	GB/T11982.1/ISO26987	Fine
Dimensional Stability	GB/T11982.1/ISO23999	≤0.4%
Anti-slip Performance	DIN51130	R9
Roller Wear	GB/T11982.1/ISO4918	>25000R
Fire-proof Performance	GB/T8624	Grade B1
Limit of Harmful Substances	GB18586	Qualified