

# YUNTA


- Homogeneous Vinyl Flooring




YUNTA-1001



YUNTA-1002

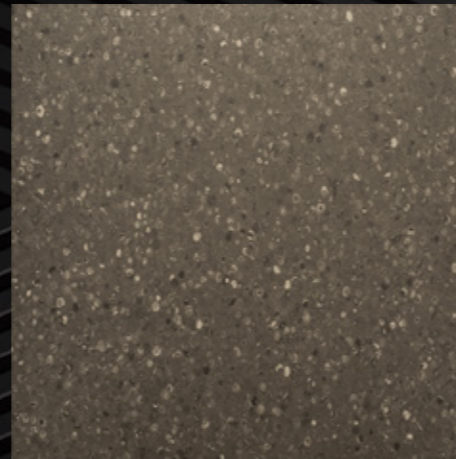

YUNTA-1004

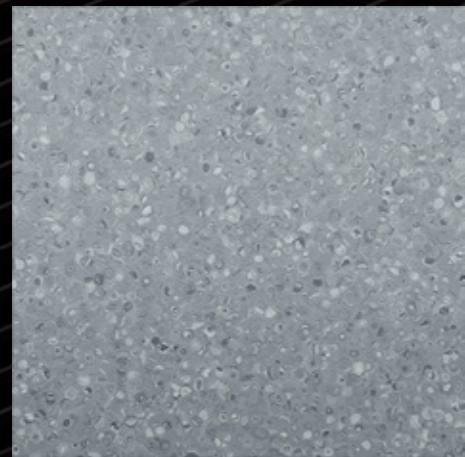

YUNTA-1013



YUNTA-1015



YUNTA-1016

YUNTA

**ottoman**  
BY ENESCO



## TECHNICAL CHARACTERISTICS

TEST ITEMS	TEST METHOD	TEST RESULTS
Total Thickness	EN ISO 24346	2.0mm
Weight	EN ISO 23997	2900g/m <sup>2</sup>
Roll Width	EN ISO 24341	2m
Roll Length	EN ISO 24341	20m
European Rating	EN 685	34-43
Fire Classification	EN 13501-1	ClassBfls1
	EN ISO 9239-1(≥8KW/m <sup>2</sup> )	≥11KW/m <sup>2</sup>
	EN ISO 11925-2	Qualified
Anti-static Property	EN 1815	<2KV
Anti-slip Test	DIN 51130(R9:6° ≤X≤10°)	9.6°
	EN 13893	μ≥0.3
Wear Resistance	EN 660-2	Group T Fv≤2.0mm <sup>3</sup>
Dimensional Stability	EN ISO 23999	≤0.4%
Residual Indentation	EN ISO 24343-1(≤0.1mm)	0.01mm
Castor Chair Test	EN 425	Qualified
Flexibility	EN ISO 24344	Qualified
Color Fastness	EN ISO 105-B02	≥Grade 6
Chemical Resistance	EN ISO 26987	Fine
Anti-bacterial Property	EN ISO 846	No Bacteria
Special Maintenance Treatment		PUR
TVOC after 28 Days	ISO 16000(A+:<10μg/m <sup>3</sup> )	<5μg/m <sup>3</sup>
Improvement of Sound Insulation	EN ISO 717-2	3dB