


Conductive Pvc


# Hkonji

AF Com Center, Samed Vurgun Küç. No.60  
Nesimi / Baku AZ1014 AZERBAYCAN  
+994 12 5966030 +994 50 2503366  
info@ottoman.az

F.S.M Mahallesi. Yeşil Vadi Konakları F/61  
Ümraniye / İstanbul 34771 TÜRKİYE  
+90 216 6502250 +90 541 3777671  
info@enesco.com.tr

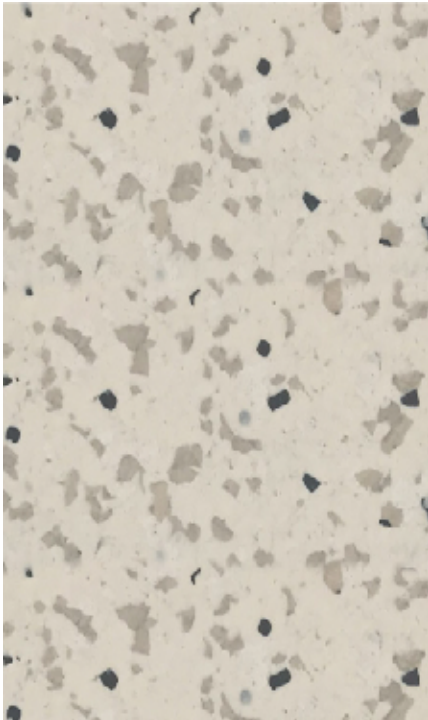

1502

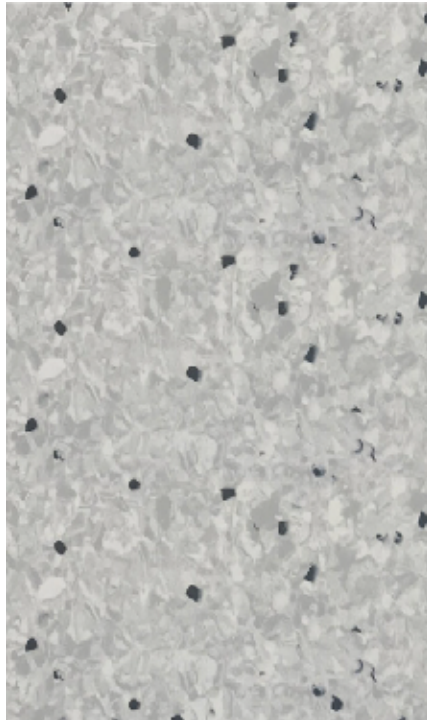


1512




1513




1516

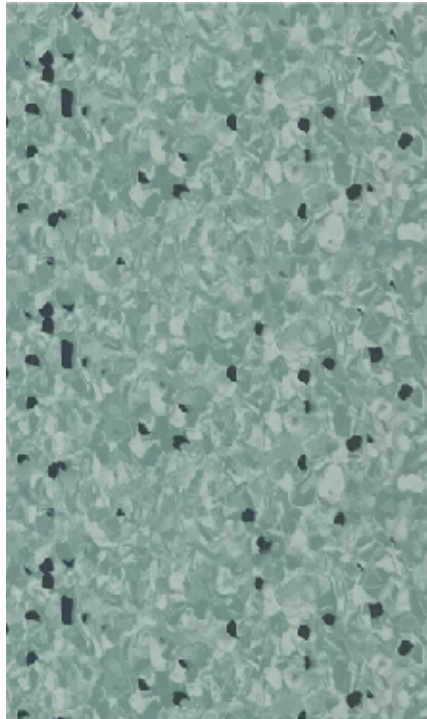


1517

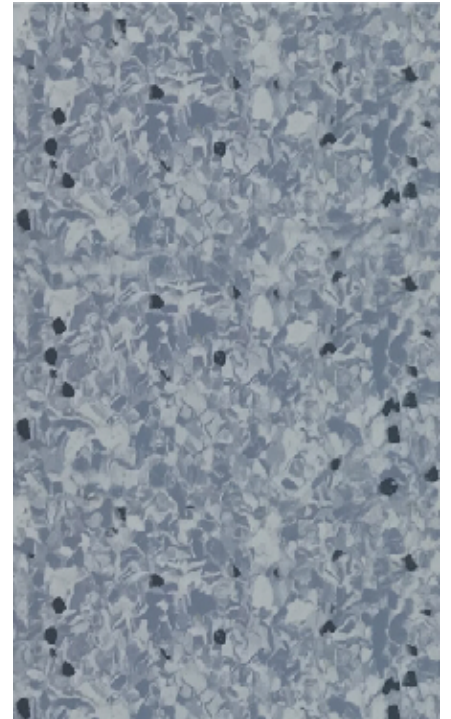

1520

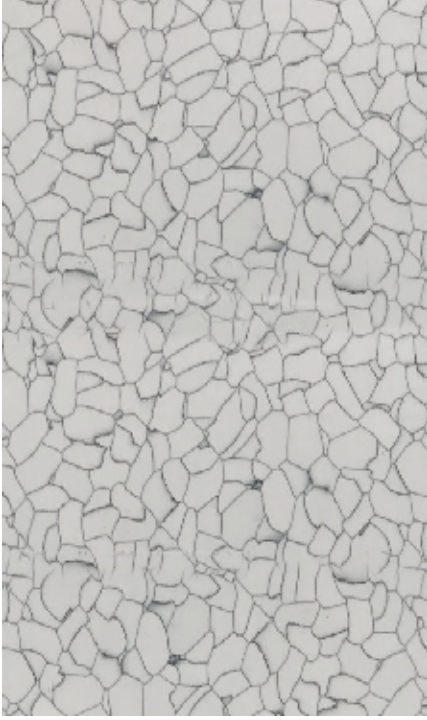

001

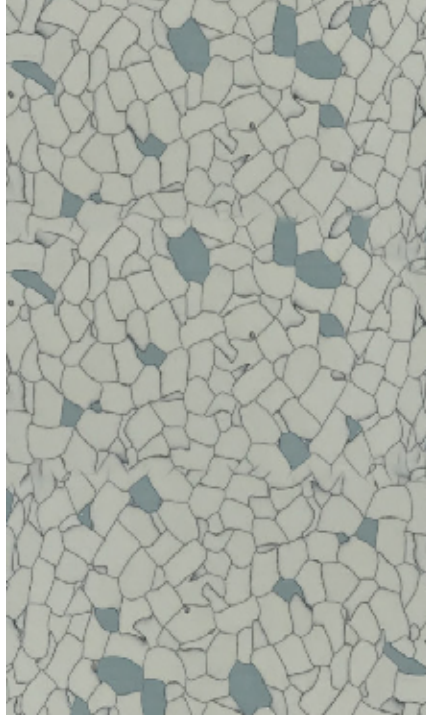

002



108



908



909

Thickness : 2 mm

Conductive PVC | EN 649 | ISO 10581

- These products, which are resistant to shocks, do not have the problem of breaking or scratching, are not affected by moisture, water, or dampness, and are divided into groups according to their characteristics.
- Conductive PVC is a coating that does not allow static electricity in an environment with extremely high electrical resistance to negatively affect people and devices. It shows very high resistance to chemicals and betadine.